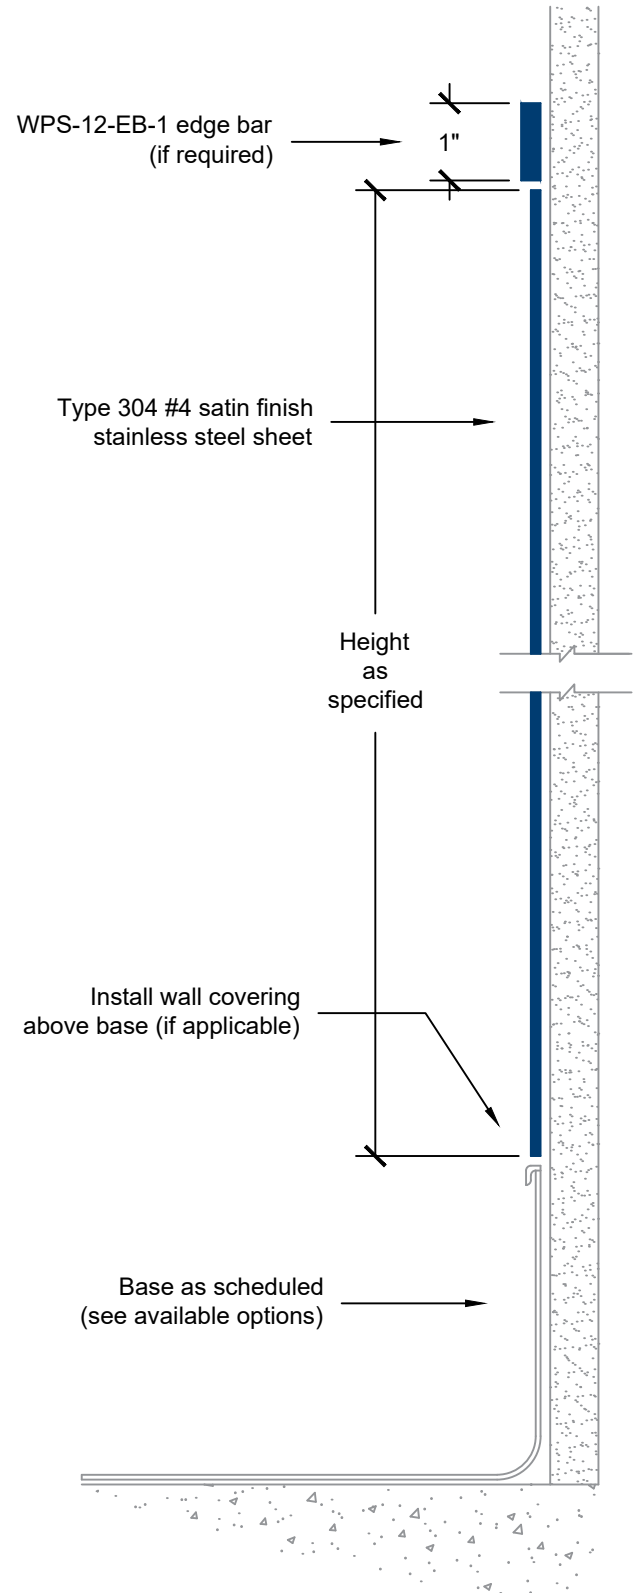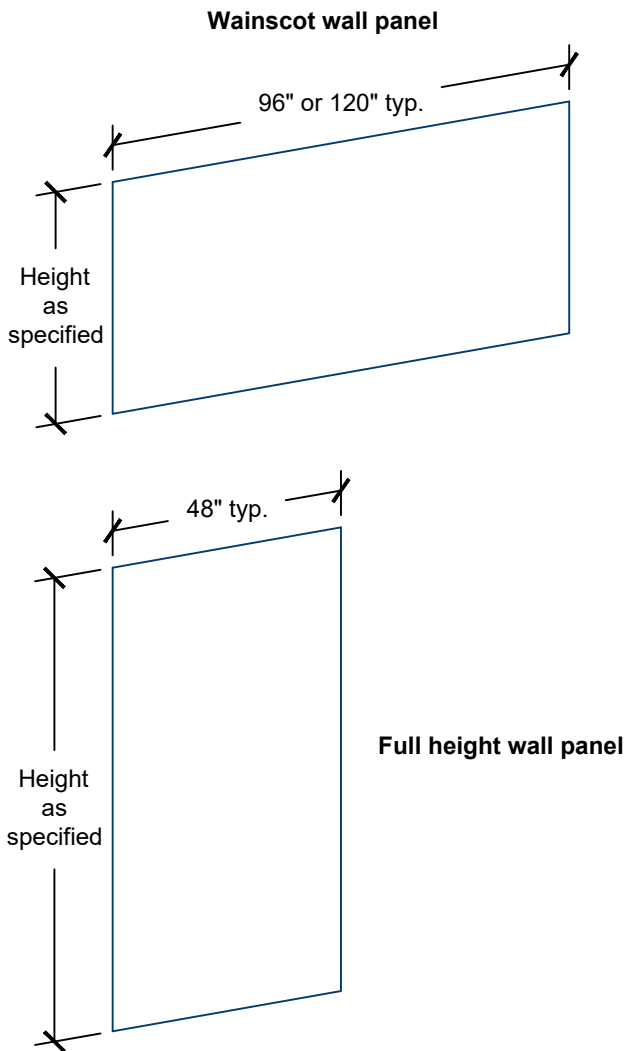# WPS-12 Stainless Steel Wall Covering

- Type 304 #4 satin finish stainless steel
- Wainscot or full height installation
- 1/2-inch offset overlapping seams
- Other stainless steel grades and finishes available

Standard Sheet Sizes

- 48-inch x 96-inch
- 48-inch x 120-inch
- Custom sizes available

Mounting Options

- ADH-50 silicone sealant adhesive
- Mechanical fasteners (supplied by others)
- Pre-drilled mounting holes available

Wainscot wall panel

96" or 120" typ.

Height as specified

48" typ.

Full height wall panel

Height as specified

WPS-12-EB-1 edge bar
(if required)

1"

Type 304 #4 satin finish
stainless steel sheet

Height as specified

Install wall covering
above base (if applicable)

Base as scheduled
(see available options)

sales@protekmail.com | www.proteksystem.com
800-598-2153 | 561-395-8155
1250 Wallace Dr. Unit B | Delray Beach, FL 33444

WPS-12

WPS-12 Stainless Steel Wall Covering

- Type 304 #4 satin finish stainless steel
- Wainscot or full height installation
- 1/2-inch offset overlapping seams
- Other stainless steel grades and finishes available

Standard Sheet Sizes

- 48-inch x 96-inch
- 48-inch x 120-inch
- Custom sizes available

Mounting Options

- ADH-50 silicone sealant adhesive
- Mechanical fasteners (supplied by others)
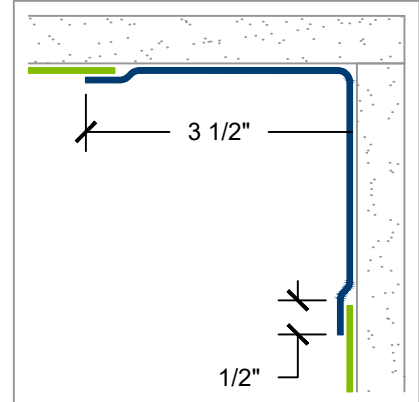- Pre-drilled mounting holes available

WPS-12-ICG-50 inside corner

- Type 304 #4 stainless steel
- 3 1/2-inch wing size
- 1/2-inch offset construction both wings
- 1/8-inch corner radius
- Height as specified

3 1/2"

1/2"

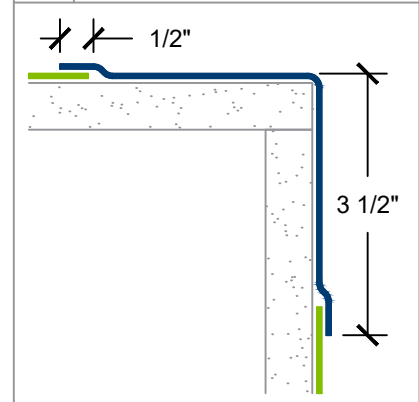| IC | Inside corner detail |

WPS-12-OCG-50 outside corner

- Type 304 #4 stainless steel
- 3 1/2-inch wing size
- 1/2-inch offset construction both wings
- 1/8-inch corner radius
- Height as specified

1/2"

3 1/2"

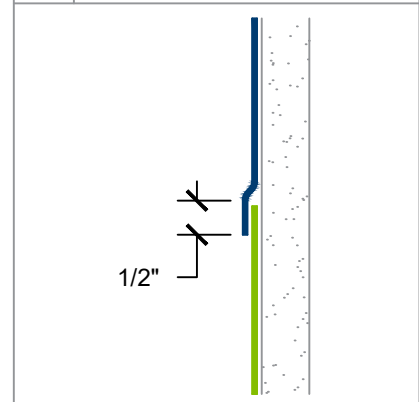| OC | Outside corner detail |

IC

J

OC

WPS-12 sheet with offset

- Type 304 #4 stainless steel
- Size as specified
- 1/2-inch offset construction on one vertical edge
- Required at all vertical seams

1/2"

| J | 1/2-inch offset joint detail |

sales@protekmail.com | www.proteksystem.com
800-598-2153 | 561-395-8155
1250 Wallace Dr. Unit B | Delray Beach, FL 33444

WPS-12