
# Protek Systems, Inc

ProTek Systems Inc 2799 N.W. 2nd Ave Boca Raton, FL 33431 Telephone: 800-598-2153 Fax: 800-347-9149 sales@protekmail.com

## D-4 Extruded Bumper

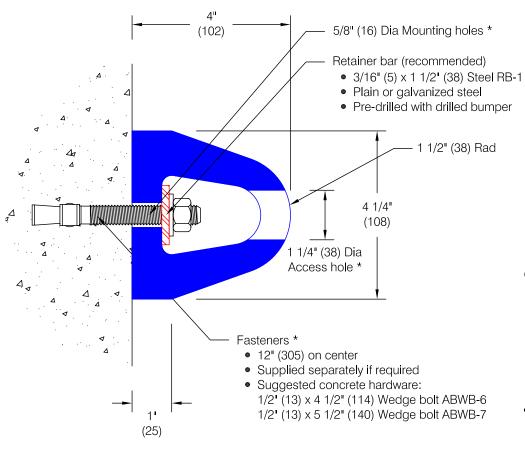

#### Features:


- Extruded EPDM rubber to RMA tolerances
- Durometer: (ASTM D-412) 70 ±5 shore A
- Tensile strength PSI: (ASTM D-412) 1,750 min
- Elongation: (ASTM D-412) 395 min.
- Tear strength: (ASTM D-624) 229 lbs./in, Min.
- Impact resistance: (ASTM 2632) 75%
- Low temp brittleness: (ASTM D-746) -40 degrees F min.
- Ozone: (ASTM D-1171) 1142 hrs @ 102 degrees F; 20% strain - no cracks
- Deflection: (ASTM D-575) 60,000 ft./lbs. 60,000 ft./lbs. - 3" (76) with no ruptures
- Stock length: 12'-0" (3658) Black 12'-0" (3658) Yellow 10'-0" (3048) Gray

### Optional Features:

- Drilled for hardware: Approximately 12" (305) on center Spacing from end varies as restricted by length
- Custom drilling available
- Urethane end cap, (EP-4) black only

#### Standard Colors:

- Black #1
- Gray #5
- Yellow #12

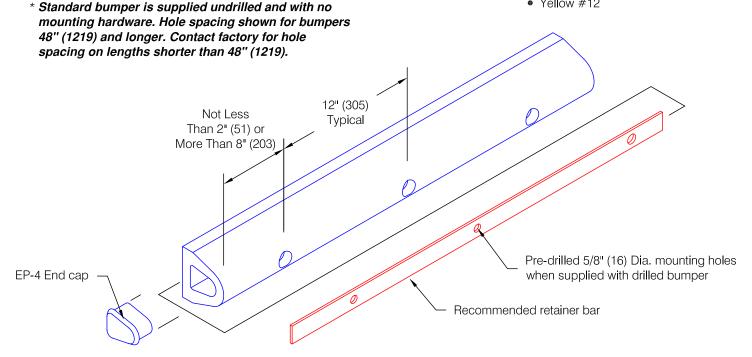

| Customer:   | Project :   |         |
|-------------|-------------|---------|
| Architect : | Sales Rep : | UD.3.00 |