WPSP-12 Patterned Stainless Steel Wall Covering

- Type 304 #4 finish patterned stainless steel
- Wainscot or full height installation
- 1/2-inch offset overlapping seams
- Manufacturer's standard patterns
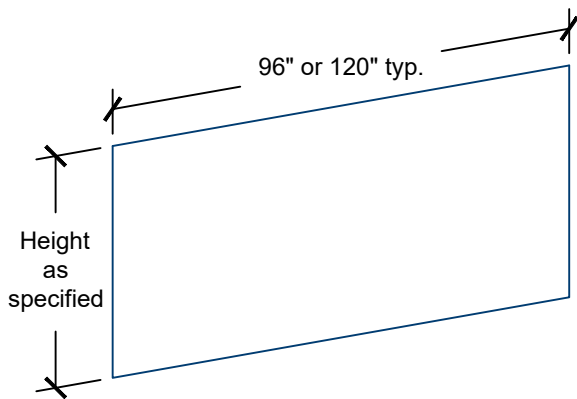- Other stainless steel grades and finishes available

Standard Sheet Sizes

- 48-inch x 96-inch
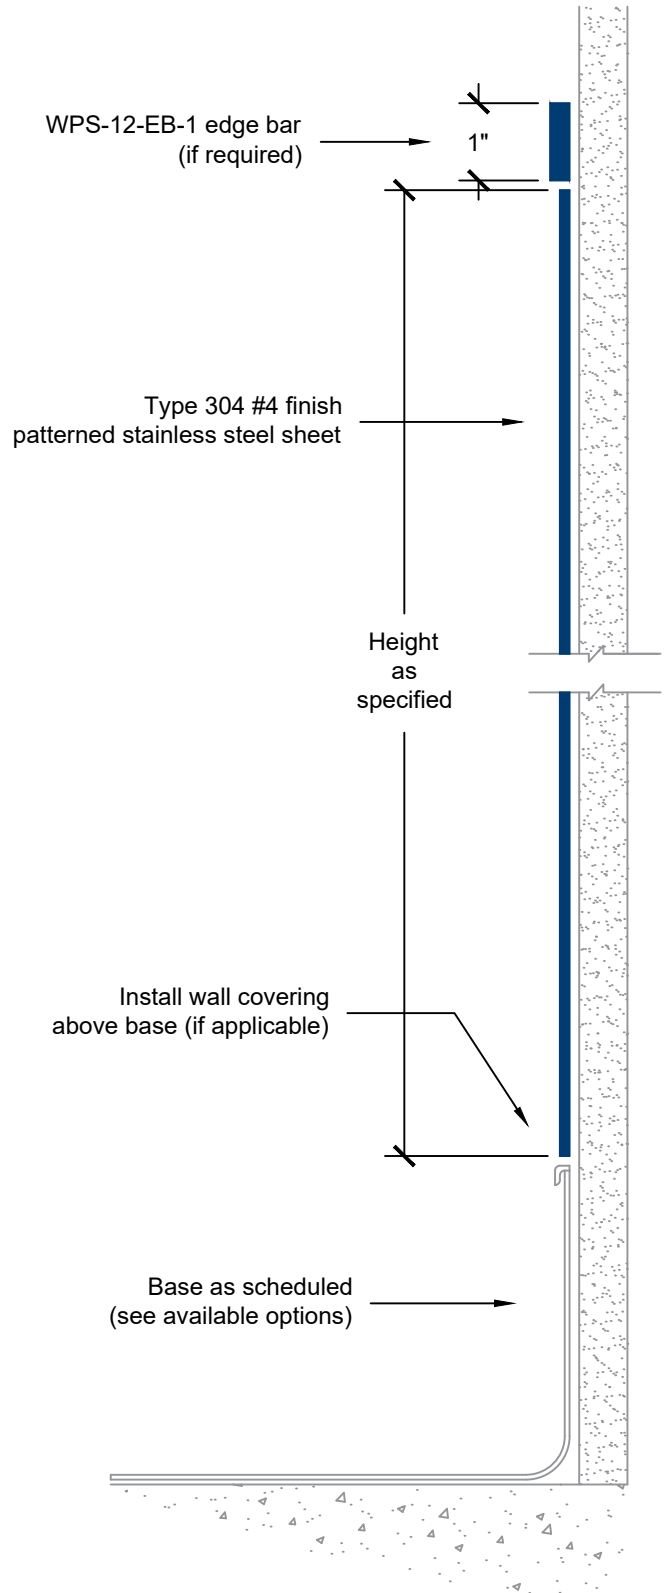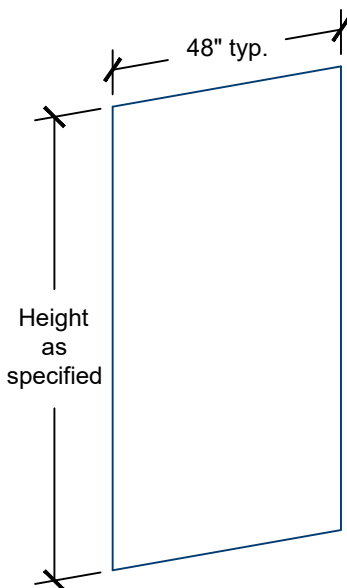- 48-inch x 120-inch
- Custom sizes available

Mounting Options

- ADH-50 adhesive
- Mechanical fasteners (supplied by others)
- Pre-drilled mounting holes available

Wainscot wall panel

96" or 120" typ.

Height as specified

48" typ.

Full height wall panel

Height as specified

WPS-12-EB-1 edge bar
(if required)

1"

Type 304 #4 finish
patterned stainless steel sheet

Height as specified

Install wall covering
above base (if applicable)

Base as scheduled
(see available options)

sales@protekmail.com | www.proteksystem.com
800-598-2153 | 561-395-8155
1250 Wallace Dr. Unit B | Delray Beach, FL 33444

WPSP-12

WPSP-12 Patterned Stainless Steel Wall Covering

- Type 304 #4 finish patterned stainless steel
- Wainscot or full height installation
- 1/2-inch offset overlapping seams
- Manufacturer's standard patterns
- Other stainless steel grades and finishes available
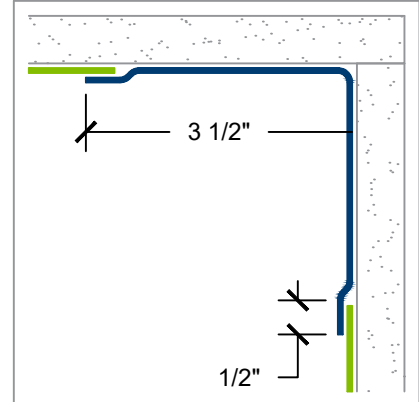
Standard Sheet Sizes

- 48-inch x 96-inch
- 48-inch x 120-inch
- Custom sizes available

Mounting Options

- ADH-50 adhesive
- Mechanical fasteners (supplied by others)
- Pre-drilled mounting holes available
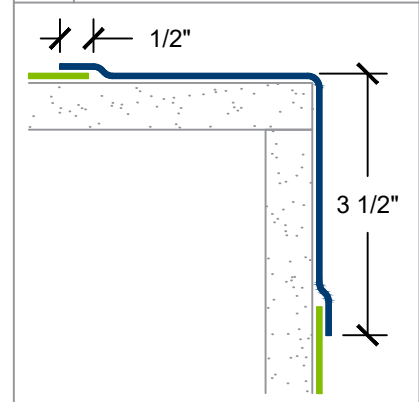
WPSP-12-ICG-50 inside corner

- Type 304 #4 patterned stainless steel
- 3 1/2-inch wing size
- 1/2-inch offset construction both wings
- 1/8-inch corner radius
- Height as specified

IC	Inside corner detail

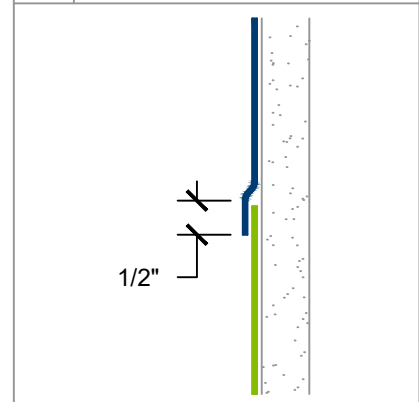**WPSP-12-OCG-50 outside corner**

- Type 304 #4 patterned stainless steel
- 3 1/2-inch wing size
- 1/2-inch offset construction both wings
- 1/8-inch corner radius
- Height as specified

OC	Outside corner detail

WPSP-12 sheet with offset

- Type 304 #4 patterned stainless steel
- Size as specified
- 1/2-inch offset construction on one vertical edge
- Required at all vertical seams

J	1/2-inch offset joint detail

sales@protekmail.com | www.proteksystem.com
800-598-2153 | 561-395-8155
1250 Wallace Dr. Unit B | Delray Beach, FL 33444

WPSP-12