


CR-66 Rub Rail

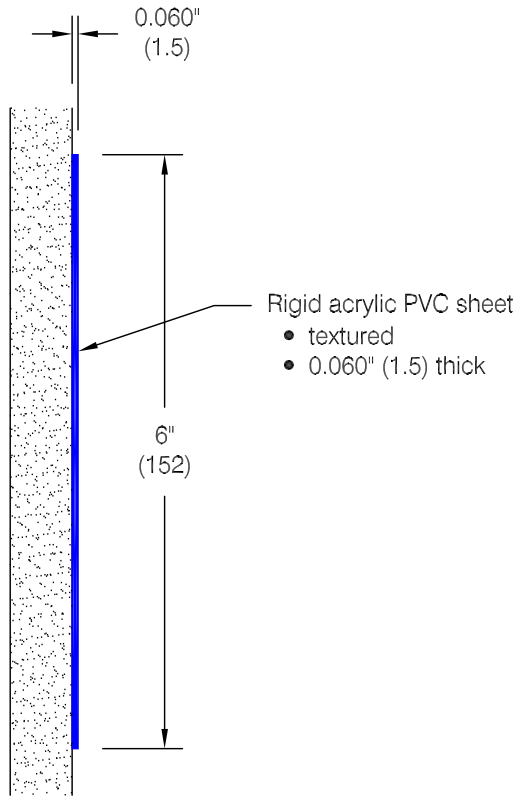

Features:


- Class A fire rating
- Heavier gauges available
- Stock length 8'-0" (2438)

Finishes:

- Manufacturer's standard colors
- Custom colors available
- Optional beveled edges


Mounting Options:

- Adhesive
 ADH-30 Contact adhesive or
 ADH-60 Mastic adhesive supplied
 separately as required
- Drilled
 Clearance holes for
 ABSS-80 #8 x 1 1/4" (32) pan head
 sheet metal screw supplied
 separately as required
- Taped
 ADH-4042 double sided adhesive
 tape factory applied to rub rail

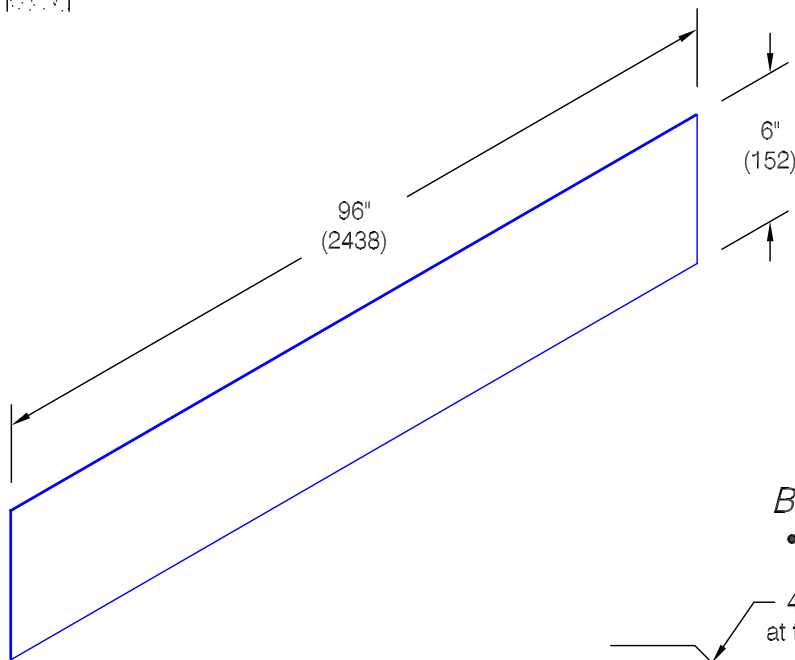

Beveled Edge Option:

- Includes chamfered top edge

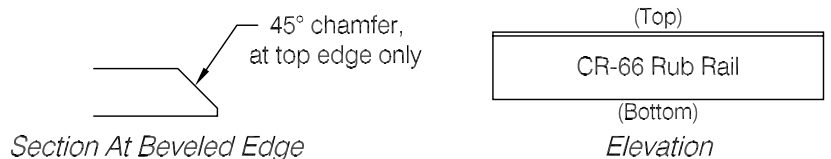

Optional Beveling Detail

Customer :	Project :	WD.43.0b
Architect :	Sales Rep :	